

Job Name		Engineer / Architect	
Job Location		Wholesaler	
Submittal Date		Contractor	

OR10/12/32/STR10/12/SSR10 Multi-Turn Straight Stop – Female Iron Pipe x Compression

Use: For use in potable water distribution systems in accessible locations only. Not intended for recirculation systems/continuous use of temperatures above 115°F. For those applications, use our KT™ series ball stop.

Design Features:

- **Machined one-piece brass body** provides strength, durability, and long-lasting performance
- **Oval knurled handle** provides a secure grip and smooth on/off operation
- **Easy-to-remove handle** with screw attachment helps protect against accidental operation during rough-ins





Operating Specifications:

Temperature: 40° - 140° F
Pressure: 125 PSI maximum



Excludes loose key handle

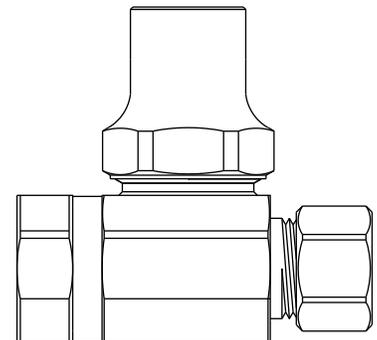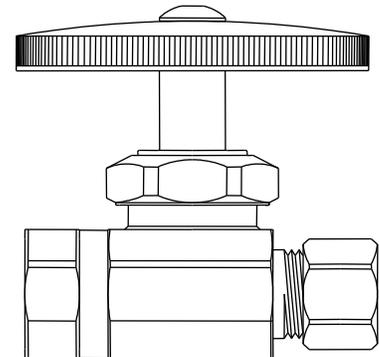

STOP MATERIAL SPECIFICATIONS	
Body	Brass or brass, chrome plated
Stem	POM or brass
Bib & Packing Washers	Rubber
Packing Nut	Brass or brass, chrome plated
Handle	Zinc, die cast plated; ABS, plated; or polycarbonate
Handle Screw	Steel, zinc plated
Compression Sleeve	Brass
Compression Nut	Brass or brass, chrome plated
Optional Loose Key	
Loose Key Stem	Brass
Lock Shield	Brass, plated
Loose Key	Zinc die cast

Part Listing:




- OR10X C 3/8" FIP x 3/8" OD compression, chrome plated
- OR10X C1 3/8" FIP x 3/8" OD compression, chrome plated, window box
- OR10X C5T 3/8" FIP x 3/8" OD compression, chrome plated, 5-pack
- OR10X CBT 3/8" FIP x 3/8" OD compression, chrome plated, bulk, plain tray
- OR10X CM 3/8" FIP x 3/8" OD compression, chrome plated, contractor pack
- OR10X R 3/8" FIP x 3/8" OD compression, rough brass
- OR10X BZ 3/8" FIP x 3/8" OD compression, oil-rubbed bronze
- OR10X NS 3/8" FIP x 3/8" OD compression, satin nickel

This specification and all information contained herein is the confidential and exclusive property of Brasscraft Manufacturing Company and shall not be disclosed to others without the written consent of Brasscraft Mfg. Co. This specification must be returned to Brasscraft Mfg. Co. if requested.

OR10/12/32/STR10/12/SSR10 Multi-Turn Straight Stop – Female Iron Pipe x Compression

Part Listing (con't):

- OR10ZX C 3/8" FIP x 3/8" OD compression, brass stem, chrome plated
- OR12X C 1/2" FIP x 3/8" OD compression, chrome plated
- OR12X C1 1/2" FIP x 3/8" OD compression, chrome plated, window box
- OR12X C5T 1/2" FIP x 3/8" OD compression, chrome plated, 5-pack
- OR12X CBT 1/2" FIP x 3/8" OD compression, chrome plated, bulk, plain tray
- OR12X CM 1/2" FIP x 3/8" OD compression, chrome plated, contractor pack
- OR12X R 1/2" FIP x 3/8" OD compression, rough brass
- OR12X RM 1/2" FIP x 3/8" OD compression, rough brass, contractor pack
- OR12X BZ 1/2" FIP x 3/8" OD compression, oil-rubbed bronze
- OR12X NS 1/2" FIP x 3/8" OD compression, satin nickel
- OR12ZX C 1/2" FIP x 3/8" OD compression, brass stem, chrome plated
- OR32X C 1/2" FIP x 1/2" OD compression, chrome plated
- OR32X C1 1/2" FIP x 1/2" OD compression, chrome plated, window box
- OR32X CD 1/2" FIP x 1/2" OD compression, chrome plated, carded
- OR32X CM 1/2" FIP x 1/2" OD compression, chrome plated, contractor pack
- SSR10X C 3/8" FIP x 3/8" OD compression, screwdriver slot, chrome plated
- STR10X C 3/8" FIP x 3/8" OD compression, loose key, stuffing box, chrome plated
- STR12X C 1/2" FIP x 3/8" OD compression, loose key, stuffing box, chrome plated

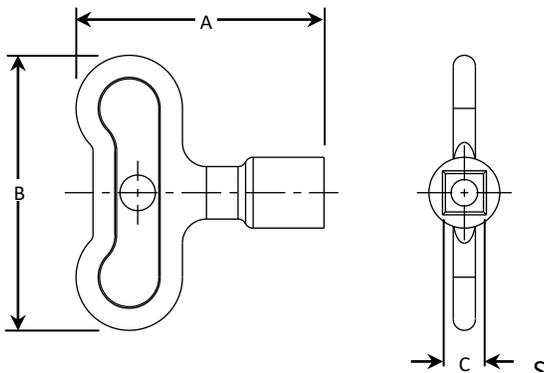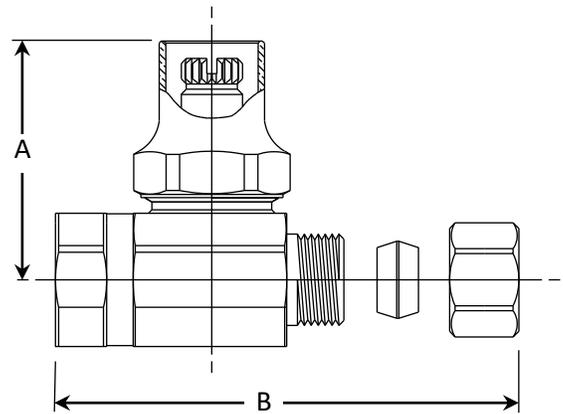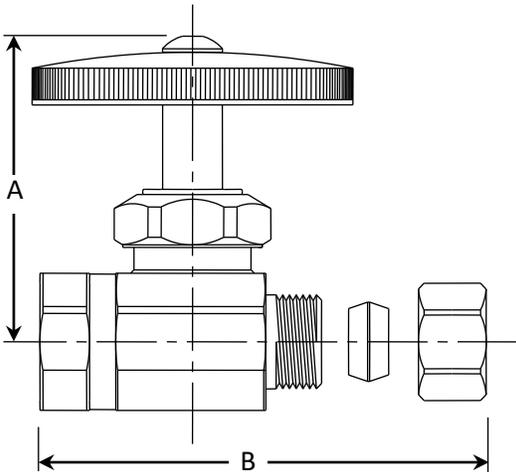

PART DIMENSIONS (Inches)		
Model	DIM. A	DIM. B
OR10X	1.94	2.02
OR10ZX	1.94	2.02
SSR10X	1.63	2.02
STR10X	1.63	2.02
OR12X	1.63	2.07
OR12ZX	1.63	2.07
STR12X	1.94	2.07
OR32X	1.70	2.22

Listings & Certifications:

- IAPMO listed to ASME A112.18.1 / CSA B125.1 (includes NSF/ANSI 372 & NSF61)



Excludes loose key handle

This specification and all information contained herein is the confidential and exclusive property of Brasscraft Manufacturing Company and shall not be disclosed to others without the written consent of Brasscraft Mfg. Co. This specification must be returned to Brasscraft Mfg. Co. if requested.

BrassCraft[®]