

# Barrington™ Comfort Height®

Pressure Lite® Toilet K-3578-RA

#### **Features**

- Vitreous china.
- Elongated bowl.
- Comfort Height®.
- Equipped with Sloan FLUSHMATE® Sloan® Valve Company.
- Polished chrome trip lever.
- Rear outlet.
- Less seat and supply.
- 4" (102 mm) rough-in.
- 1.0 gpf (3.8 lpf).
- 12" (305 mm) x 10" (254 mm) water area.
- 31" (787 mm) x 21-1/4" (540 mm) x 31-1/4" (794 mm).

#### **Recommended Products/Accessories**

K-4652 Lustra™ Quick-Release™ Elongated Toilet Seat K-4652-A Lustra™ Quick-Release™ Elongated Toilet Seat

K-7637 Angle Supply with Stop (single)

K-4636 Cachet® Quiet-Close™ Elongated Toilet Seat

K-5588 Purefresh® Elongated Toilet Seat

K-4108 C3®-230 elongated cleansing toilet seat

K-5420 Low-Profile Bolt Caps

### **Included Components**

Product consists of:

K-4305 Toilet Bowl

K-4484-RA Toilet Tank

Additional Components:

Bolt cap accessory pack

Floor screws and bolt caps

Tank accessory pack

Tank cover

Trip lever





## ADA

Codes/Standards ASME A112.19.2/CSA B45.1 DOE - Energy Policy Act 1992 EPA WaterSense® ADA ICC/ANSI A117.1 CSA B651

OBC

## **KOHLER® One-Year Limited Warranty**

See website for detailed warranty information.

#### Available Colors/Finishes

Color tiles intended for reference only.


Color	Code	Description
	0	White
	96	Biscuit
	47	Almond
	7	Black BlackTI





# **Barrington™ Comfort Height®**

Pressure Lite® Toilet K-3578-RA

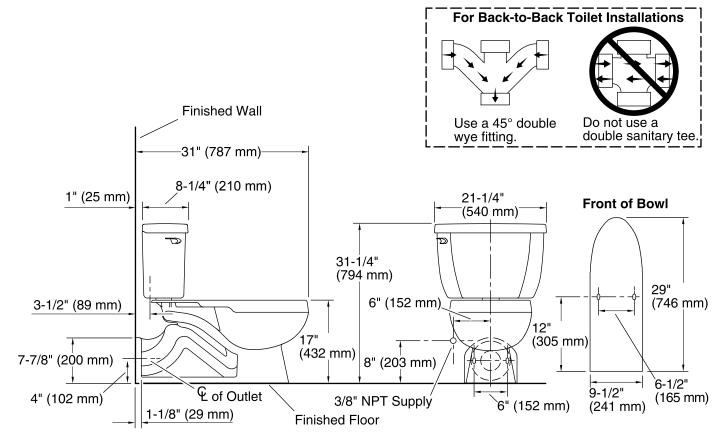

### **Technical Information**

All product dimensions are nominal.

Toilet type: Two-piece, Floor-mount

Waste Outlet: Wall
Bowl shape: Elongated

Flush type: Pressure Assisted

Trap passageway: 2-1/8" (54 mm)

Water Consumption

Full: 1 gpf (3.8 lpf)

Water surface size: 12" x 10" (305 mm x 254 mm)

Rim to water surface: 5-7/8" (149 mm)
Rough-in: 4" (102 mm)
Seat-mounting holes: 5-1/2" (140 mm)

## **Fixture Supply Requirements**

Min static pressure: 35 psi (241.3 kPa) Max static pressure: 80 psi (551.6 kPa)

#### **Notes**

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a 45° double wye fitting.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations. Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.

Accessibility standards may require controls to be located on the open side of the toilet.

